

General Information:

Stage Director: John Hoomes
Set Designer: Barry Steele
Lighting Designer: Barry Steele
Video Designer: Barry Steele
Costume Designer: Wardrobe Witchery
Built by: Nashville Opera in 2023
 Traditional, Unit set w/props
History of Previous Usage: Nashville Opera (2023)

Primary Contact:

Randy Williams
 Director of Production
 (615) 832-5242
rentals@nashvilleopera.org

Rental Information:

Number of Vans: 1 for Scenery
Size of Vans: 26' Air-Ride Box Truck
Costs: Available upon request.

Must have load-bars, straps and pads
Insurance Required: \$60,000

Original Theatre Information:

Nashville production presented at the James K. Polk Theatre, Tennessee Performing Arts Center (TPAC)

Polk Theatre Prosc. height: 30' - 2"
Polk Theatre Prosc. width: 46' - 11"
Polk Theatre Stage depth: 50' - 0" to back wall
Polk Theatre Apron depth: 11' - 11" from edge of stage to proscenium line
Polk Theatre SL Wing Space: 22' - 0"
Polk Theatre SR Wing Space: 18' - 10"


Set Technical Information:

Minimum Width: 42' - 0"
Minimum Depth: 24' - 0" (Allows maximum space for rear projection)
Line Sets for scenery: 11 including legs, borders and RP
Line Sets for electrics: 6 (estimate)
Line Sets for masking: 8 (estimate)
Height of tallest Unit: 10' - Rolling Unit
Height of Tallest Flying Piece: 16' - Flying Wall
Furthest Upstage Flying Piece: 24' - 0" - RP
Dimensions of Largest Flying Piece: 44' wide x 20' tall
Props & Scenic Elements Included: Complete Props available
Items not Included: Legs and Borders, RP, Scaffolding for raising rear projector to desired height
Notes: Rear projector was raised to approx. 15' off the deck, Title Rental Available, Nashville used projectors to complete scenic elements - static images could be used instead


Crew Requirements: In Nashville, the following crew sizes were used. Crew sizes may vary for the renting company based on theatre and schedule. Nashville Opera used a non-union crew. Scenery was not constructed for repertory presentation.

	Load-In	Running	Strike
Carpenters	6	4	8
Fly Rail	2	1	2
Props	2	3	2
Electricians	6	4 (3 FS)	6
Truck Loaders	N/A	N/A	N/A
Approximate Time	+/- 8 hours	3 hours	4-6 hours

Act 1

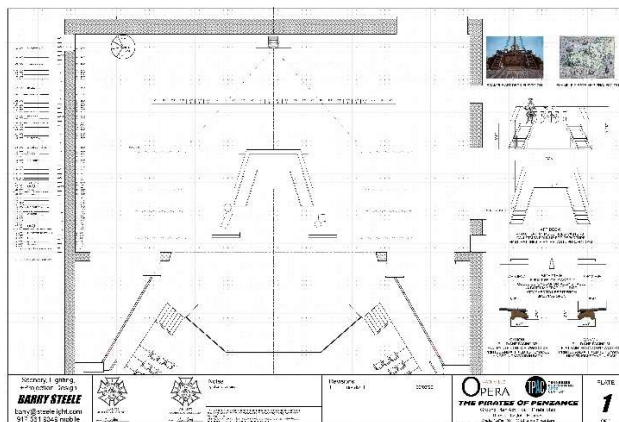

Act 2 - Beach

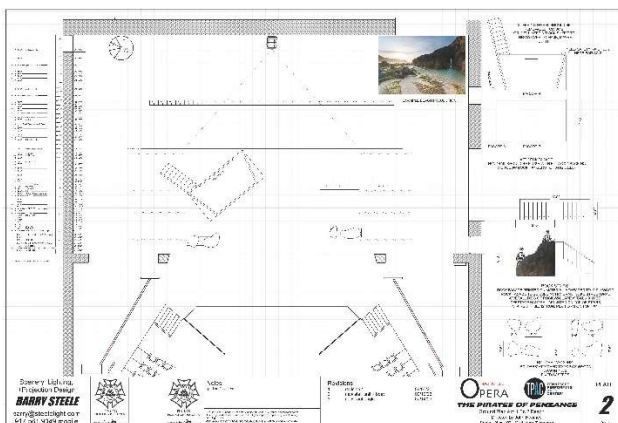

Act 2 - Chapel

